



Utförande: Oljad alt. svartbetsad ekfanér. Bländskydd av matt akryl, vid metallhalogen klart täckglas Kan även tillverkas i andra träslag och ytbehandlingar på begäran. Finns med ett flertal olika ljuskällor.

Montage: På vägg, kan monteras i önskad riktning.

Anslutning: Kopplingsplint 5x4mm².

Design: Fredrik Mattson 2010.

W	FÄRG/FINISH	ART.
26-32W/Gx24q	Oljad ek/Oiled oak	8030-1-32
32W/Gx24q	Oljad ek/Oiled oak	8030-1-32HFF
35W/G12	Oljad ek/Oiled oak	8031-1-32
LED*	Oljad ek/Oiled oak	8032-1-32
26-32W/Gx24q	Svart ek/Black oak	8030-1-36
32W/Gx24q	Svart ek/Black oak	8030-1-36HFF
35W/G12	Svart ek/Black oak	8031-1-36
LED*	Svart ek/Black oak	8032-1-36

HFF = Dimmbart med DALI, DSI, SwitchDim

HFF = Dimmable with DALI, DSI, SwitchDim.

LED* se www.zero.se för teknisk information gällande Led.




LED* visit www.zero.se for technical information regarding LEDs.

Finish: Oiled oak veneer natural or black stained. Matt acrylic diffuser. When metal halide clear glass. Available in other wood finishes and stains on request. Available with several light sources. 26-32W compact fluorescent, 35W metal halide and LED Philips Fortimo 2000 lumen.

Installation: On wall, can be installed in different directions.

Connection: Terminal block 5x4mm².

Design: Fredrik Mattson 2010.

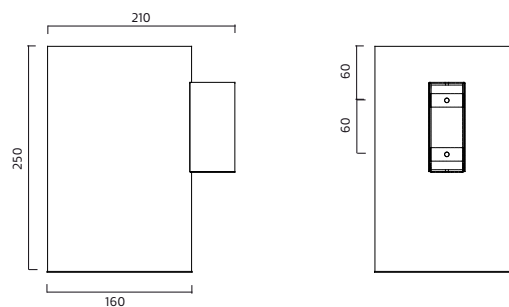

Andra spridningsvinklar på begäran.
Other beam angles on request.



