



Stolparmatrur med dynamisk avbländning som med stor exakthet bryter bort ljuset från bländningskritiska vinklar. För att uppleva armaturen helt upplyst måste man befinna sig i dess direkta närområde. På håll lyser armaturen bara svagt och markerar därmed bara sin position.

Utförande: Grålackerad aluminium alt. svartlackerad aluminium. Kupa av slagtålig polykarbonat. Asymmetriskt och symmetriskt tak finns som tillbehör, grålackerat alt. svartlackerat med vit undersida. Kompaktlysrör, högtrycksnatrium alt. metallhalogen.

Montage: Monteras på standardstolpe 3000 mm över mark. Stolpfäste D 60 mm. Stolpe finns som tillbehör. Fundament tillhandahålls ej av Zero.

Anslutning: Via säkringsinsats 4x10mm² i stolpe.

Design: Per Sundstedt.

Med patenterad dynamisk avbländning. Patent nr. 9902727-8

Lampstandard with dynamic reflector which refracts the light away from critical dazzle glare angles with great precision. You have to be in the immediate vicinity of the lampshade to see it fully illuminated. At a distance, the lampshade only gives a gentle light and thus indicates its position.





Finish: Grey or black painted aluminium. Shade in polycarbonatee. Upper shade available as accessory.

Installation: On standard pole diameter 60 mm 3-4 m above ground.

Connection: Terminal block 4x10mm².

Design: Per Sundstedt.

With patented dynamical reflector. Patent no. 9902727-8

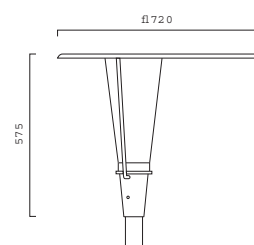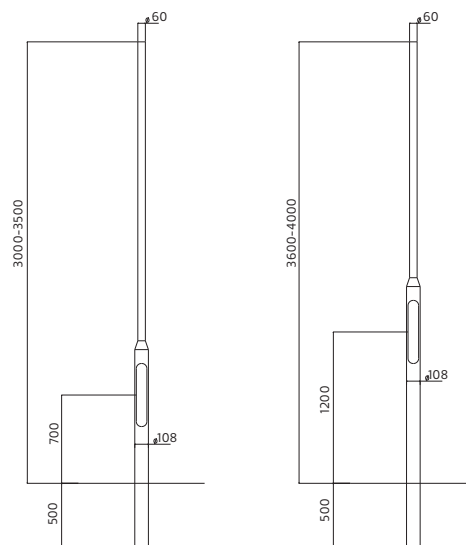


W	FÄRG/FINISH	ART
35W/E27/ME	Svart/Black	3248-1-06
35W/E27/ME	Grå/Grey	3248-1-10
70W/E27/ME	Svart/Black	3252-1-06
70W/E27/ME	Grå/Grey	3252-1-10
70W/E27/SE/ME**	Svart/Black	3253-1-06
70W/E27/SE/ME**	Grå/Grey	3253-1-10
57W/Gx24q-5	Svart/Black	3254-1-06
57W/Gx24q-5	Grå/Grey	3254-1-10
70W/ME/E27*	Svart/Black	3255-1-06*
70W/ME/E27*	Grå/Grey	3255-1-10*
70W/SE/E27*	Svart/Black	3259-1-06*
70W/SE/E27*	Grå/Grey	3259-1-10*
LED/2000lm/25W/830	Svart/Black	3276-1-06
LED/2000lm/25W/830	Grå/Grey	3276-1-10

* = Elektroniskt driftdon/Electrical control gear.


** = För ljuskälla med tändspänning max 2,3 kV.

** = For lamp with ignition voltage max 2,3 kV

TILLBEHÖR/ACCESSORIES	FÄRG/FINISH	ART
Asymmetriskt tak/Asymmetrical top shade	Svart/Black	93255-1-06
Asymmetriskt tak/Asymmetrical top shade	Grå/Grey	93255-1-10
Symmetriskt tak/Symmetrical top shade	Svart/Black	93257-1-06
Symmetriskt tak/Symmetrical top shade	Grå/Grey	93257-1-10
Svartlackerad stolpe 3-4 m/Black pole 3-4 m	Svart/Black	93230-1-06
Grålackerad stolpe 3-4 m/Grey pole 3-4 m	Grå/Grey	93230-1-10

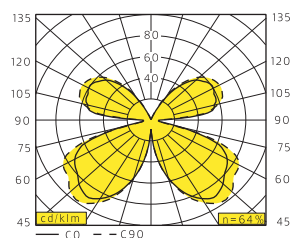

Utan tak/Without top shade

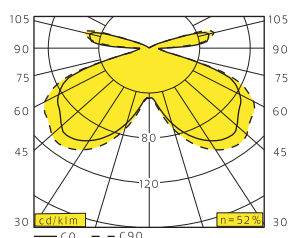

Med tak/With top shade

