



Enkel och stilren väggarmatur som ger ett bra allmänljus. Glasskärmar kan fås med olika mönster. Finns även med inbyggd nödljus.

Utförande: Mörkgrå strukturlack. Skärm av matt opalglas alt. matt akryl.

Montage: På vägg.

Anslutning: Snabbkopplingsplint 5x4mm². Överkopplingsbar.

Design: Per Sundstedt.

W	H/MM	SKÄRM/SHADE	KG	ART
11W/2G7	270	Glas/Glass	1,7	4038-1-01HF
11W/2G7	270	Akryll/Acrylic	1,5	4038-1-27HF
11W/2G7	270	Glas/spår/Glass/ribs	1,7	4038-1-31HF
2xE14 max 40W	380	Glas/Glass	2,4	4039-1-01
2xE14 max 40W	380	Akryll/Acrylic	2,3	4039-1-27
2xE14 max 40W	380	Glas/spår/Glass/ribs	2,4	4039-1-31
18W/2G11	290	Glas/Glass	2,5	4040-1-01HF
18W/2G11	290	Glas/Glass	2,5	4040-1-01HFF
18W/2G11	290	Akryll/Acrylic	1,9	4040-1-27HF
18W/2G11	290	Akryll/Acrylic	1,9	4040-1-27HFF
18W/2G11	290	Glas/spår/Glass/ribs	2,5	4040-1-31HF
18W/2G11	290	Glas/spår/Glass/ribs	2,5	4040-1-31HFF
24W/2G11	380	Glas/Glass	2,7	4041-1-01HF
24W/2G11	380	Glas/Glass	2,7	4041-1-01HFF
24W/2G11	380	Akryll/Acrylic	2,3	4041-1-27HF
24W/2G11	380	Akryll/Acrylic	2,3	4041-1-27HFF
24W/2G11	380	Glas/spår/Glass/ribs	2,7	4041-1-31HF
24W/2G11	380	Glas/spår/Glass/ribs	2,7	4041-1-31HFF
18W/2G11	290	Glas/Glass	2,9	4140-1-21HF*
18W/2G11	290	Akryll/Acrylic	2,3	4140-1-27HF*
24W/2G11	380	Glas/Glass	3,1	4141-1-21HF*
24W/2G11	290	Glas/spår/Glass/ribs	2,9	4140-1-31HF*
24W/2G11	380	Akryll/Acrylic	2,9	4141-1-27HF*
24W/2G11	380	Glas/spår/Glass/ribs	3,1	4141-1-31HF*

HFF = Dimmbart med DALI, DSI, SwitchDim

HFF = Dimmable with DALI, DSI, SwitchDim.

* = Med inbyggd nödljus 1 tim./* = With emergency pack 1h.




Finish: Dark-grey painted steel. Shade in matt opal glass or matt opal acrylic.

Installation: Wall installation.

Connection: Snap-in terminal block 5x4mm². Two cable entries.

Design: Per Sundstedt.




TAK/CEILING 30-31


PENDLAR/PENDANTS 102

VÄGG/CEILING 130-132

4038

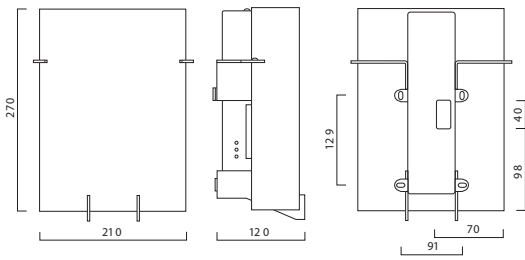

4040

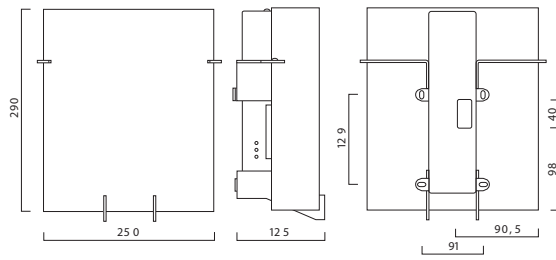

4039/4041

