
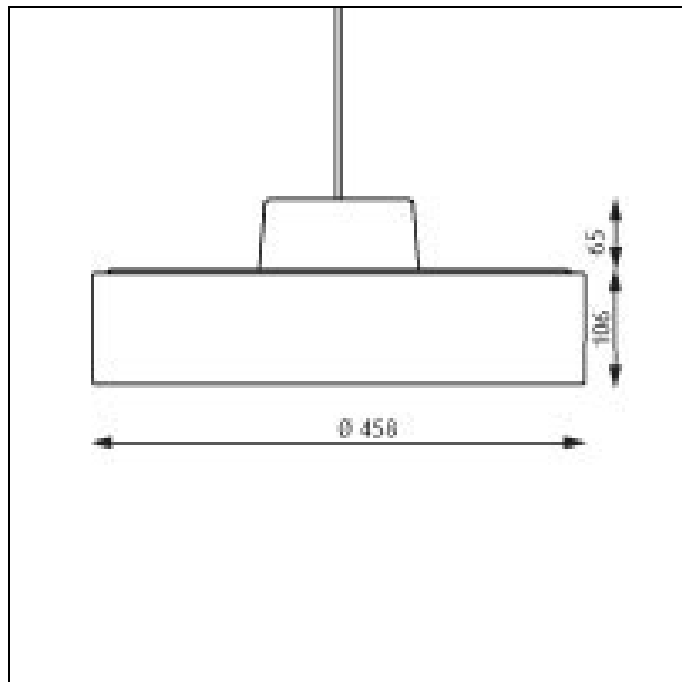


LP Circle Suspended

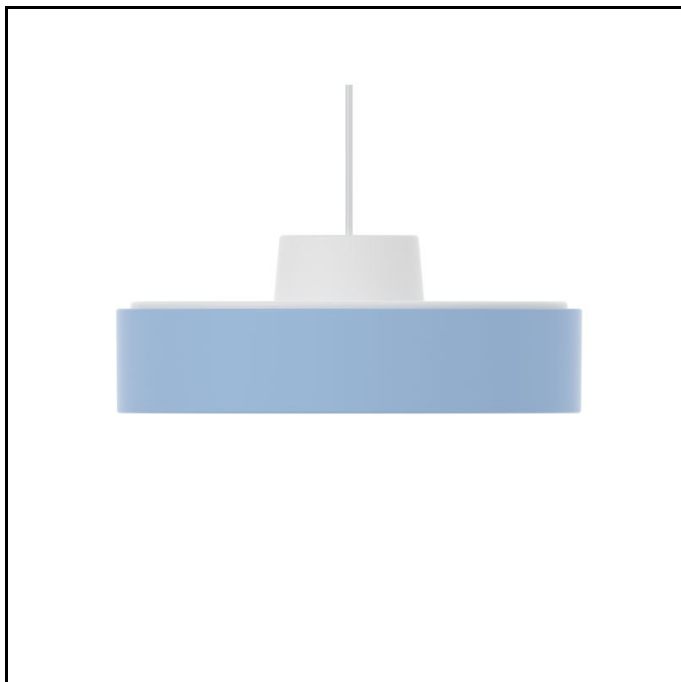

Design Mikkel Beedholm/KHR arkitekter

Concept The fixture emits diffuse light via a high-efficiency acrylic diffuser. The diffuser, which is encircled by a voluminous coloured or white ring, is hidden when viewed from low angles. Angling the inner side of the ring 5° creates a comfortable and decorative graduation of the light from the diffuser. Perforated body discreetly illuminates the other components of the fixture.

Finish White, Blue, Red or Black. Powder coated.

Material Reflector: Deep drawn aluminium. Diffuser: Acrylic, frosted.

Mounting Hung: Cord 5x1.5mm², 3m.

Weight Max 5kg. (Ø450).

Class Ingress protection IP20. Electric shock protection I.

Product Code	Dimensions	Light source	Finish	Lighting control
LP-CIRC-SUSP	Ø 450	30W LED 3000K 30W LED 4000K	BLK BLUE RED WHT	DALI/SWITCH-DIM DIM 1-10V

Specification notes

The driver is built into the fixture All LED power measurements are measured as system power.

Info notes

LED technology is constantly developing. The specifications given are based on existing technology. Please find updated info on products on our website www.louispoulsen.com. Please contact Louis Poulsen for the following versions: LP Circle Ø 450 HO: High output for projects with high ceilings or where high illumination is required. LP Circle Ø 450 HE: Improved efficiency, while standard lighting levels can still be achieved. LP Circle Ø 450 with microprismatic diffuser for UGR <19 (CIE 117). If you have special requirements concerning colour temperature, IP class, emergency lighting solutions or other modifications to the LP Circle model, please contact Louis Poulsen.