


Beat Surfacemounted

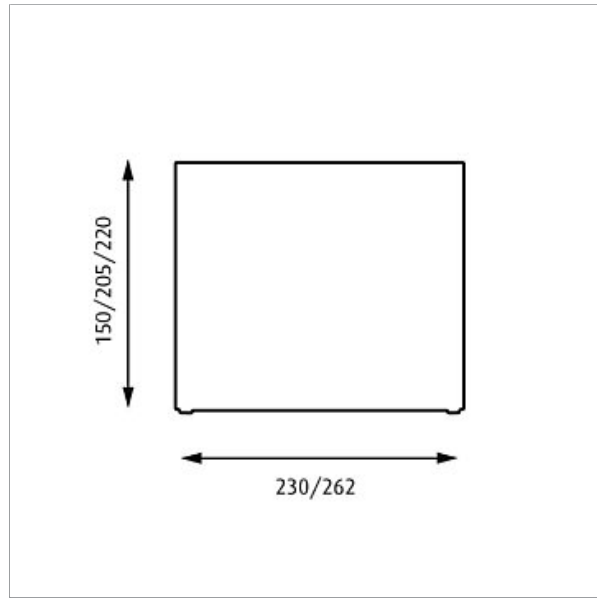

Design: Louis Poulsen Lighting A/S

Concept: The fixture emits light directed 100% downwards. The choice of a polished or matt reflector provides either distinct or diffuse light. A wide range of decor rings help control the light and provide decorative effects.

Finish: White, powder coated.

Material: Reflector: Aluminium, matt anodised or metallised polished aluminium. Housing: Steel.

Mounting: Directly on ceiling. Terminal Block: 1x5x2.5mm². Cable entries: Top entry. Looping: Approved, max. 5x1,5mm². For more information please look at www.louispoulsen.com.

Weight: Max. 2kg.

Class: Ingress protection IP20. Electric shock protection I w. ground.

Product code	Dimensions	Light source	Finish	Reflector	Lighting control
BEAT-SU	230/205 230/150 262/220	1x18W TC-TEL GX24q-2 HF 1x26W IC-1EL GX24q-3 HF 1x32W IC-1EL GX24q-3 HF 1x32W IC-1EL GX24q-3 HF-D 1x26/32W IC-1EL GX24q-3 HF 2x32W IC-1EL GX24q-3 HF 2x32W IC-1EL GX24q-3 HF-D 1x14W TC-TEL GR14q-1 HF 1x14W TC-TEL GR14q-1 HF-D	WHT	ALU MATT ALU POLISH	NOT APPLICABLE DALI/USI/SWITCH-DIM/SMART-DIM DIM 1-10V DALI/SWITCH-DIM

Specification notes

Dimming only available with 32W TC-TEL and 14W TC-TEL. 230/205 & 230/150 only available with 1x14W, 1x18W, 1x26W, 1x32W and 1x32W HF-D. 262/220 only available with 1x26/32W, 2x32W, 1x32W HF-D and 2x32W HF-D. 1x14W TC-TEL HF-D: DALI/SWITCH-DIM.

Info notes

All lighting application data is based on TC-TEL light sources with amalgam. For further emergency versions, please contact the sales office. Accessories: www.louispoulsen.com.