


AL 600 LED

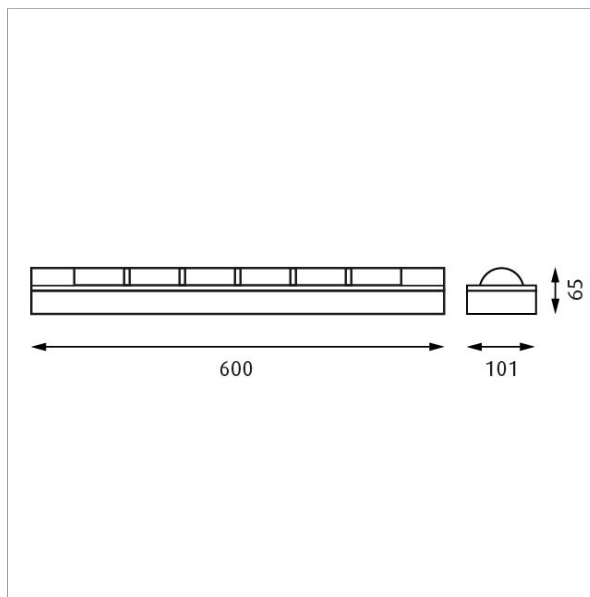

Design: Mads Odgård

Concept: The fixture has either a wide or very wide beam width. The two lightdistributions expand the flexibility in optimizing the lighting in narrow surroundings like tunnels and arcades. The design is low and sturdy.

Finish: Aluminium coloured with textured surface, powder coated.

Material: Housing: Die cast aluminium. Diffuser: Polycarbonate.

Mounting: Looping: Approved. Integral ballast. Installation cabel: 8-13mm. (not enclosed).

Weight: Max. 3 kg.

Class: Ingress protection IP65. Electric shock protection I w. ground. IK10.

Product code	Light source	Finish	Reflector
AL-600-C	6 POWER LED 3200K 6,5 6 POWER LED 3200K 10/15	ALU COL TEXT	VERY WIDE WIDE

Specification notes
I 6 POWER LED 3200K has Nom. Effekt 6,5W, WIDE. II 6 POWER LED 3200K has Nom. Effekt 10/15W, VERY WIDE.

Info notes
Can be fitted directly on a wall or ceiling. Connection in each end, through wiring possible 4x2,5mm². The innovation of the LED technology is constant. The specifications mentioned are based on present technology. Please find updated info on products on our website www.louispuulsen.com.

**louis
puulsen**