

SWING

Design by Liovore Altherr Molina.

VIBIA
LIGHT IS CREATION

Reference

0515.

Application

Floor Lamps


Description

Floor light ideal for reading. It is distinguished by a double-jointed arm which houses the whole mechanism so that neither the system nor the joint components can be seen when it is turned round. Designed by Liovore, Altherr, Molina. Available in two finishes: chrome and matt nickel. It has a switch on the cable and its metal diffuser is movable.

Diffuser

Adjustable metal diffuser

Finish




0515-01.

Chrome

0515-30.

Matt nickel

Sketch

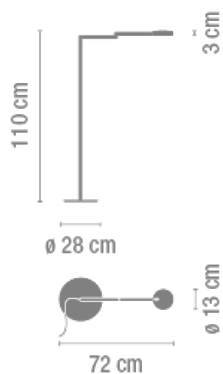

Electrical characteristics

1 x G9 230V 48W Eco



Total 48 W



Physical characteristics

1 Box / 0.38 x 0.36 x 1.71 m. / Vol. 0.2575 m³ /
Gross weight 10.5 kg. / Net weight 6.3 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 76.99%

Coordinate system : C-G

Total flux : 630.00 lm

Maximum value : 942.78 cd/klm

Light position : C=0.00 G=20.00


Double symmetrical : 3

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

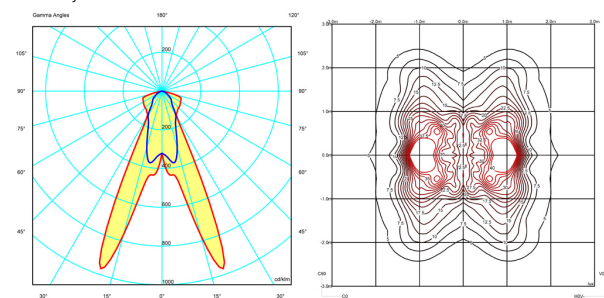

Certificates

