

SWING

Design by Lievore Altherr Molina.

VIBIA
LIGHT IS CREATION

Reference

0512.

Application

Wall Lamps

Installation type

Surface

Description

Wall lamp for general lighting which distributes light equally in all directions. It is distinguished by a double-jointed arm which houses the whole mechanism so that neither the system nor the joint components can be seen when it is turned round. Designed by Lievore, Altherr, Molina. Available in two finishes: chrome and matt nickel. It has a switch on the lamp holder for convenience.

Diffuser

Cotton-finish diffuser

Finish




0512-01.

Chrome

0512-30.

Matt nickel

Sketch



Electrical characteristics

1 x LED 3W 700mA

And

1 x E27 230V 70W Eco



Total 73 W

Or


1 x COMPACT FLUORESCENT E27 230V 15W



1 x LED 3W 700mA



Total 18 W

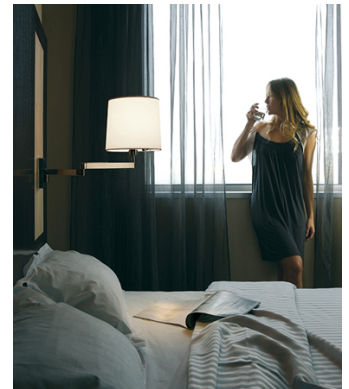

Physical characteristics

2 Box / 0.21 x 0.21 x 0.74 m. / Vol. 0.0556 m³ /
Gross weight 2.2 kg. / Net weight 1.5 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Reading

Lamp having a light beam whose main function is to supply sufficient light for reading.



Photometric data

Efficiency : 80.91%

Coordinate system : C-G

Total flux : 939.00 lm

Maximum value : 249.15 cd/klm

Light position : C=0.00 G=0.00


Double symmetrical : 3

Isolux : Isolux (sueLo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

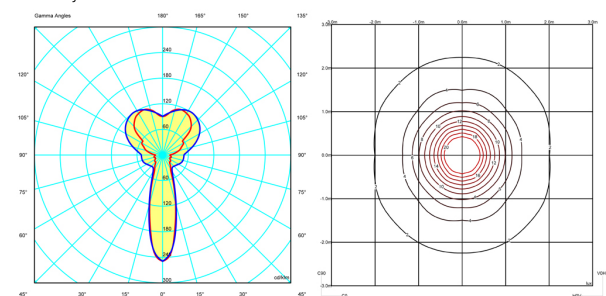

Certificates

