

MICRO

Design by Ramos & Bassols.

VIBIA
LIGHT IS CREATION

Reference

2015.

Application

Outdoor lamps

Installation type

Surface

Description

Compact surface-mounted wall light for indoor and outdoor use. Designed by Ramos & Bassols. Gives a general ambient light. Available in two finishes: white lacquer and rust.

Diffuser

Polycarbonate diffuser

Finish



2015-03. White lacquer
2015-54. Oxide-brown lacquer

Sketch




Electrical characteristics

3 x LED 1W 350mA



Total 3 W



Physical characteristics

1 Box / 0.13 x 0.20 x 0.21 m. / Vol. 0.0050 m³ /
Gross weight 1.1 kg. / Net weight 0.7 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 100.00%

Coordinate system : C-G

Total flux : 96.36 lm

Maximum value : 141.58 cd/klm

Light position : C=15.00 G=105.00


Double symmetrical : 3

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=2.50m

Light rotation :

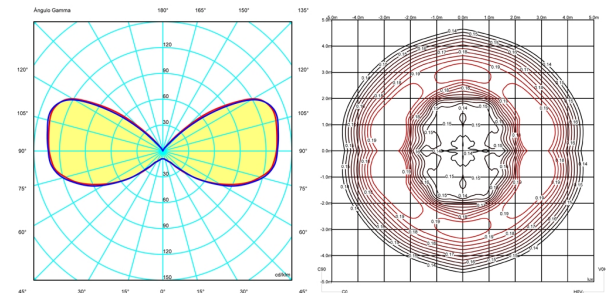

Certificates

