

PLUS

Design by X. Claramunt and M. de Mas.

VIBIA
LIGHT IS CREATION

Reference

0615.

Application

Ceiling Lamps

Installation type

Surface

Description

Symmetrical ceiling light, designed by X. Claramunt and M. de Mas. Direct, diffuse and uniform light distribution. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its large size makes it ideal for lighting large spaces from a single point and its form recalls a real skylight. Features dimmable electronic ballast (DALI System).

Diffuser


Acrylic diffuser

Finish



0615-03.
Matt white
lacquer

Sketch

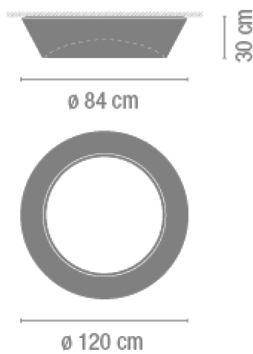

Electrical characteristics

2 x G5 230V 24W (T5)

And

4 x G5 230V 39W (T5)

Total 204 W



Physical characteristics

1 Box / 0.38 x 1.37 x 1.37 m. / Vol. 0.7080 m³ /
Gross weight 37.2 kg. / Net weight 22.5 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 45.12%

Coordinate system : C-G

Total flux : 15900.00 lm

Maximum value : 151.49 cd/klm

Light position : C=0.00 G=0.00


Double symmetrical : 2

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

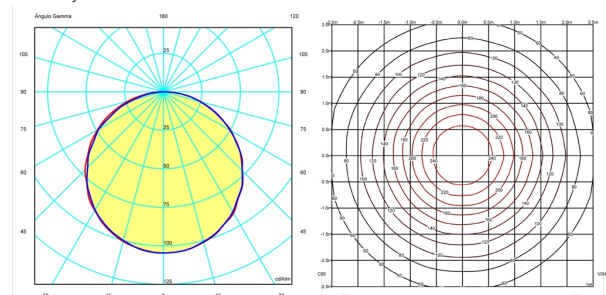

Certificates

