

QUADRA ICE

Design by Prolif Diffusion Studio.

VIBIA
LIGHT IS CREATION

Reference

1128.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling or wall fitting, in optical glass to fit perfectly into the setting as it has no profile.

Diffuser


Optical-glass diffuser

Finish



1128-00.
White glass


Sketch



Electrical characteristics

1 x R7s 80mm 230V 120W Eco

Total 120 W



Physical characteristics

1 Box / 0.21 x 0.41 x 0.41 m. / Vol. 0.0353 m³ /
Gross weight 2.2 kg. / Net weight 1.4 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 74.37%

Coordinate system : C-G

Total flux : 2300.00 lm

Maximum value : 172.19 cd/klm

Light position : C=0.00 G=0.00


Double symmetrical : 3

Isolux : Isolux (suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

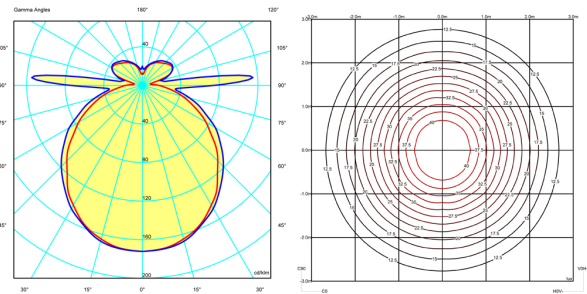

Certificates

