

QUADRA ICE FLAT

Design by Proli Diffusion Studio.

VIBIA
LIGHT IS CREATION

Reference

1122.

Application

Ceiling Lamps

Installation type

Surface

Description

Panel light with optical glass diffuser.

Diffuser


Optical-glass diffuser

Finish



1122-00.
White glass

Sketch



Electrical characteristics

1 x R7s 117mm 230V 160W Eco

Total 160 W



Physical characteristics

1 Box / 0.27 x 0.60 x 0.60 m. / Vol. 0.0972 m³ /
Gross weight 4.7 kg. / Net weight 3.0 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 68.08%

Coordinate system : C-G

Total flux : 3300.00 lm

Maximum value : 155.87 cd/klm

Light position : C=75.00 G=5.00


Double symmetrical : 3

Isolux : Isolux (suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

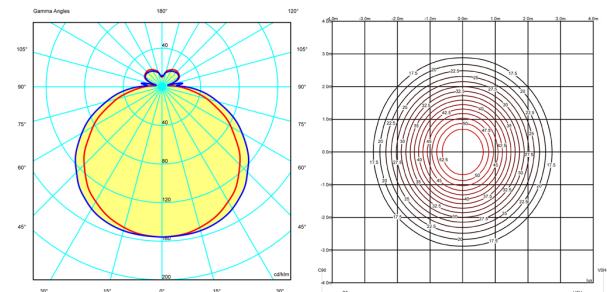

Certificates

