

FUNNEL

Design by .

VIBIA
LIGHT IS CREATION

Reference

2004.

Application

Ceiling Lamps

Installation type

Surface

Description

Light for ceiling or wall fitting. Gives an indirect light which is ideal for creating a cosy atmosphere in any room. Non-dazzle. Available in five finishes: red, black and white lacquer, chrome and gold leaf.

Diffuser


Aluminium diffuser

Finish



2004-01. Chrome
2004-03. White lacquer
2004-04. Black lacquer
2004-06. Red lacquer
2004-51. Gold leaf

Sketch




Electrical characteristics

2 x G9 230V 60W Eco



Total 120 W

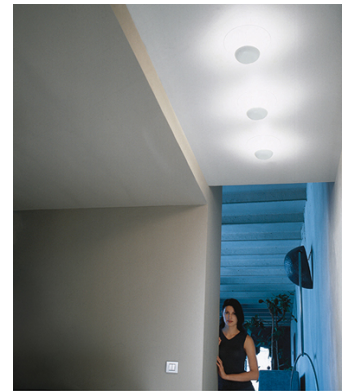

Physical characteristics

1 Box / 0.27 x 0.27 x 0.16 m. / Vol. 0.0116 m³ /
Gross weight 0.9 kg. / Net weight 0.5 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

Efficiency : 48.65%

Coordinate system : C-G

Total flux : 1960.00 lm

Maximum value : 199.07 cd/klm

Light position : C=90.00 G=115.00


Double symmetrical : 3

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

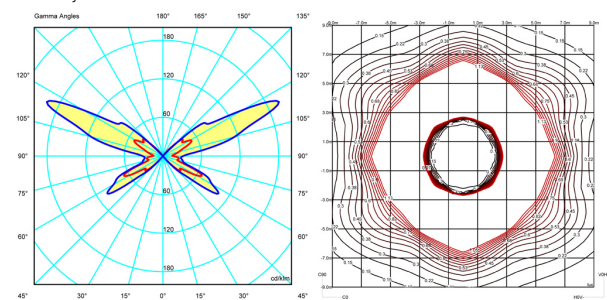

Certificates

