

Reference

4350.

Application

Ceiling Lamps

Installation type

Surface

Description

Lámpara de superficie para uso en techos y paredes. Utiliza una fuente lumínica halógena y no necesita transformador. Está realizado en acero inoxidable brillo o mate y el difusor es de vidrio óptico.

Diffuser


Optical-glass diffuser

Finish



4350-01. Shining stainless steel
4350-30. Matt stainless steel

Sketch




Electrical characteristics

1 x G9 230V 48W Eco



Total 48 W

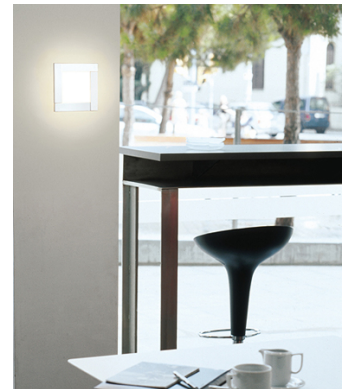

Physical characteristics

1 Box / 0.13 x 0.20 x 0.21 m. / Vol. 0.0055 m³ /
Gross weight 1.0 kg. / Net weight 0.7 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting


Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 68.10%
Coordinate system : C-G
Total flux : 3400.00 lm
Maximum value : 156.84 cd/klm
Light position : C=60.00 G=5.00
Double symmetrical : 3

Isolux : Isolux (suelo)
Light position :
X=0.00m Y=0.00m Z=2.50m
Light rotation :

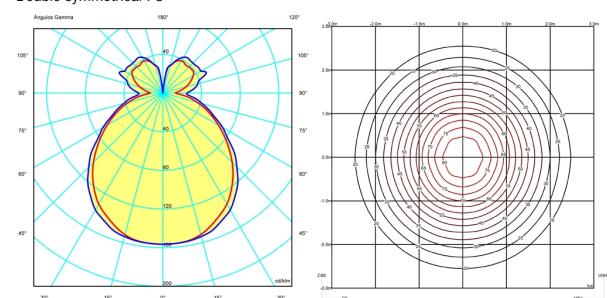

Certificates

