

Reference

4353.

Application

Ceiling Lamps

Installation type

Surface

Description

Surface-mounted light for use on ceilings. Uses a halogen light source and does not require a transformer. It is made of shiny or matt stainless steel and the diffuser is optical glass.

Diffuser


Optical-glass diffuser

Finish



4353-01. Shining stainless steel
4353-30. Matt stainless steel

Sketch

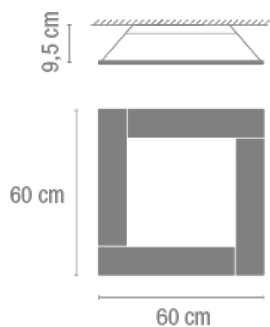

Electrical characteristics

1 x R7s 117mm 230V 160W Eco

Total 160 W



Physical characteristics

2 Box / 0.27 x 0.76 x 0.76 m. / Vol. 0.3120 m³ /
Gross weight 19.2 kg. / Net weight 11.2 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : -65.37%

Coordinate system : C-G

Total flux : 3300.00 lm

Maximum value : 142.80 cd/klm

Light position : C=0.00 G=0.00


Double symmetrical : 3

Isolux : Isolux (suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

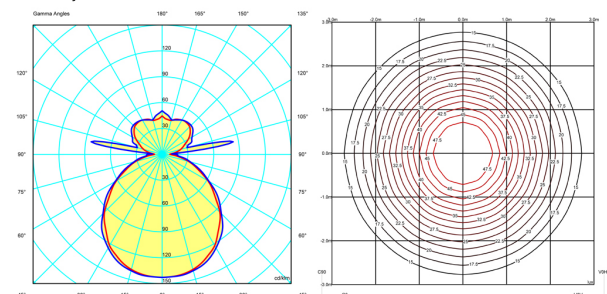

Certificates

