

SANDWICH

Design by Proli Diffusion Studio.

VIBIA
LIGHT IS CREATION

Reference

8606.

Application

Ceiling Lamps

Installation type

Surface

Description

Circular surface-mounted light. Small and flat, combining a chrome or matt nickel plate with sand-blasted glass. Can be fitted to the wall or on the ceiling to give a calm, warm light.

Diffuser

Optical-glass diffuser


Finish



8606-01.
Chrome

8606-30.
Matt nickel


Sketch



Electrical characteristics

1 x G9 230V 48W Eco

Total 48 W



Physical characteristics

1 Box / 0.13 x 0.20 x 0.21 m. / Vol. 0.0055 m³ /
Gross weight 1.0 kg. / Net weight 0.8 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 48.30%

Coordinate system : C-G

Total flux : 630.00 lm

Maximum value : 91.20 cd/klm

Light position : C=0.00 G=5.00


Double symmetrical : 3

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

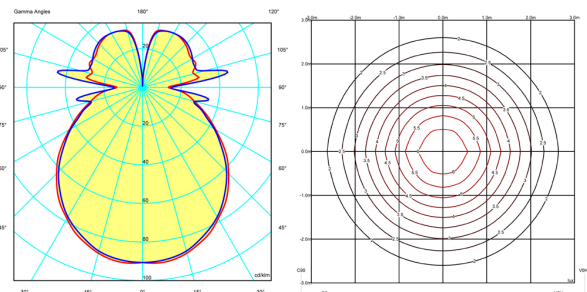

Certificates

