



Weblink
1476

Biogen Idec. San Diego, California, USA. Architect: Hellmuth, Obata + Kassabaum, Inc.
Lighting designer: Lighting Design Alliance. Photo: Scott McDonald of Hedrich Blessing

Design

Rainer Bender

Concept

Reduced offers mainly indirect general lighting. The light sources are positioned in the fixture centre above the perforated shield, providing precise optical control of the direct light and low brightness. Reduced appears as a floating sheet that seems almost weightless.

Finish

Aluminium coloured with textured surface, powder coated.

Material

Canopy: Steel. Diffuser: Acrylic or perforated stainless steel. Housing: Laser cut aluminium.

Mounting


Suspension type: Wire. Cable length: 2.5m, 3x0.75mm². Terminal block: 1x3x2.5mm².

Weight

Max. 8kg.

Class

Ingress protection IP20. Electric shock protection I w. ground.

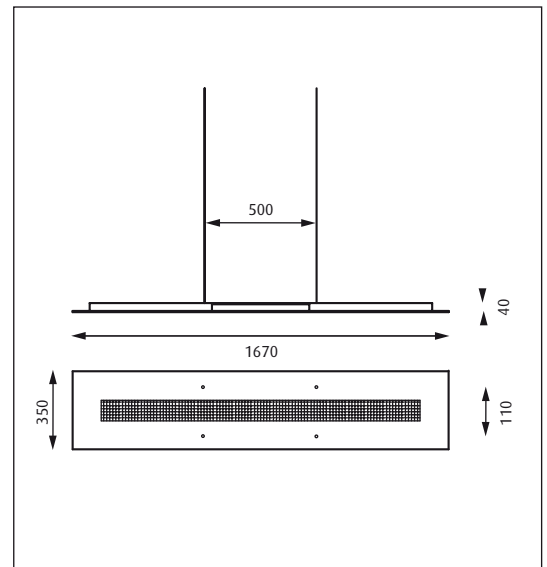

Product code	Light source	Finish	Shield/Diffuser	Lighting control
RED-P	2x35W T5 G5 HF 2x35W T5 G5 HF-D 2x49W T5 G5 HF 2x49W T5 G5 HF-D	ALU COL TEXT	DARKLIGHT/BAP PERF	NONE DALI/DSI/SWITCH-DIM/SMART-DIM

Variant notes:
HF only available with no lighting control. HF-D only available with DALI/DSI/SWITCH-DIM/SMART-DIM.

Info notes:
Suspended by 4 steel wires, 2M, directly to the ceiling with or without canopy. Integral emergency possible. For further emergency versions, please contact your sales office.

