



**Weblink**  
1457

**Project page**  
372

Tamarind Lodge, Kandi, Sri Lanka. Architect: Robert Lewis Turner & Channa Daswatt, Micd Associates. Photo: Dominic Sansoni

## Design

Louis Poulsen Lighting A/S

## Concept

Toldbod Mini and Maxi Wall provide concentrated downward and glare-free lighting. The inside is painted white to ensure good reflection, making the luminaire as efficient as possible.

## Finish

Aluminium coloured with textured surface, powder coated.

## Material

Fixture head: Die cast aluminium. Shield: Injection moulded clear polycarbonate. Wall box: Die cast aluminium. Arm: Extruded aluminium.

## Mounting


Terminal block: 1x3x2.5mm<sup>2</sup>. Cable entries: Maxi: 2x rear entries and 2x bottom entries to Ø 10-14.5mm cable. Mini: 3x rear entries and 2x knock outs in bottom to Ø 10-14.5mm cable. Looping: Approved, max. 3x1,5mm<sup>2</sup>.

## Weight

Max. 5kg.

## Class

Ingress protection, Mini: IP43, Maxi: IP44. Electric shock protection I w. ground. ⚡

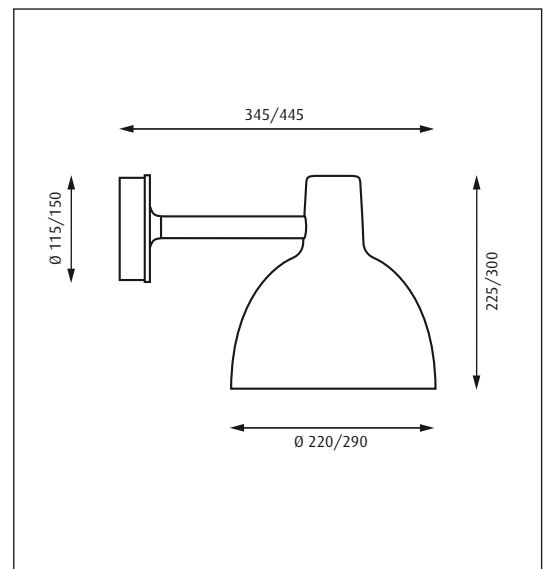

Product code	Dimensions	Light source	Finish
TOL-W	Ø 220 Ø 290	1x26W/32W/42W TC-TEL HF Inc. & vap. lamps 13055 Inc. & vap. lamps 13140	ALU COL TEXT

## Variant notes:

Toldbod Mini only available for Inc. & vap. lamps 13055 (100W incandescent and 50W HME). Maxi only available for 1x26/32/42W TC-TEL and Inc. & vap. lamps 13140 (50W HME, 80W HME, 125W HME, 50W HSE-I, 70W HSE-I, 100W A60 matt and 150W A65 matt).

## Info notes:

For incandescent and vapour lamp versions (HME and HSE-I), please order the "inc. & vap. lamps" version and note that control gear for these versions is not supplied as standard and must be ordered separately (ballast, ignitor (not for HSE-I) and capacitor) and placed in a separate remote gear box. The wall box and arm are painted in the same colour as the fixture head.



Page 158



Page 178



Page 110



Page 197