

Pendlad armatur som både ger ett bra allmänljus och ett direktljus på t ex. konferensbord eller högt placerad i samlingslokaler mm.

Utförande: Grålackerad metall. Vit plisserad skärm. Opalt akrylbländskydd. Kompaktyrör i skärm samt kompaktyrör alt. pressglaslampa PAR 38 i downlight. Vajerlängden är lätt att justera vid montage.

Montage: Pendlad från tak i vajer.

Anslutning: Snabbkopplingsplint 3x4mm². Överkopplingsbar.

Design: pelikan copenhagen.

W	KG	ART
4x26-42W/Gx24q + 2x18W/G24q-2	8,4	4413-1-35
4x32W/Gx24q-3 + 2x18W/G24q-2	8,4	4413-1-35HFF
4x42W/Gx24q-4 + 2x18W/G24q-2	8,4	4416-1-35HFF
4x26-42W/Gx24q + 80W/PAR38	7,9	4469-1-35
4x42W/Gx24q-4 + 80W/PAR38	7,9	4469-1-35HFF



HFF = Dimmbart driftdon. Fördunklas via SwitchDIM alt. DSI. Dali på begäran.
HFF = Dimmable ballast. SwitchDIM or DSI. Dali on request.

Finish: Grey painted steel. White pleated shade. Louvre in opal acrylic. Compact flourescent in the shade and downlight with compact flourescent or E27/PAR38.

Installation: Wire pendant.

Connection: Snap-in terminal block 3x4mm². Two entry holes.

Design: pelikan copenhagen.

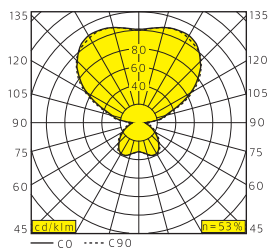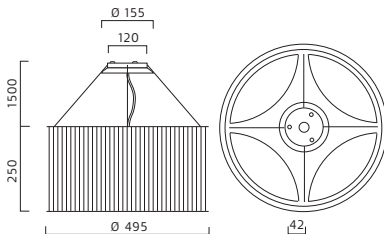

TAK/CEILING 24



PENDLAR/PENDANTS 78-82



VÄGG/WALL 115



GOLV/FLOOR 151

