



D
Leuchtgehäuse aus Stahlblech, Strahler aus Aluminium
Oberfläche in weiß oder schwarz, seidenmatt
Strahlerelement kardänisch gelagert, schwenkbar bis 30°
Wechselreflektoren aus Reinaluminium in 4 Ausstrahlwinkeln
Einbauset für randlose Montage in Gipskartondecken 10/12,5/15/20/25mm
Betoneinbaugehäuse für randlosen Einbau in Sichtbeton
Betriebsgeräteanschluss der HIT Varianten mittels Stecker
Farbfilter, Linsen, Wabenraster (max. 1 Stk.) und RGB-LED Einsatz als Zubehör

E
Luminaire housing of sheet steel, spotlight made of aluminium
Surface white or black, semi-gloss
Spotlight gimbal mounted, tiltable up to 30°
Changeable reflectors made of pure aluminium, 4 beam angles
Trimless mounting set for plasterboard ceilings 10/12,5/15/20/25mm
Housing for trimless installation in exposed concrete
Plug connection for control gear of HIT type
Colour filters, lenses, louvers (max. 1) and RGB-LED inset available as acc.


I
Corpo di lamiera d'acciaio, faretto di alluminio
Finitura bianca o nera, satinata
Faretti cardanici, orientabili fino a 30°
Riflettori d'alluminio puro cambiabili di 4 angoli
Set di montaggio per soffitti di cartongesso 10/12,5/15/20/25mm
Cassaforma per montaggio a livello in calcestruzzo a vista
Varianti HIT: Connettore per collegare il reattore
Filtri colorati, lenti, reticoli a nido d'ape (solo 1 pz.) come acc.

Type

			MITO 150 QR-LP 111 G53 CAPACITY 1x100W CODE 052-251201#
			MITO 150 HIT-CE G12 CAPACITY 1x35/70W CODE 052-251801#
			MITO 150 QR-LP 111 G53 CAPACITY 2x100W CODE 052-252201#
			MITO 150 HIT-CE G12 CAPACITY 2x35/70W CODE 052-252801#
			MITO 150 QR-LP 111 G53 CAPACITY 3x100W CODE 052-253201#
			MITO 150 HIT-CE G12 CAPACITY 3x35/70W CODE 052-253801#

052-..... **S** spot 14°
M medium 24°
F flood 40°
W wide flood 60°

Colours

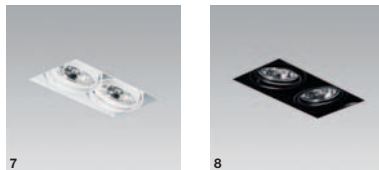

052-..... **7** white
8 black

Accessories

Einbauset für randlosen Einbau in Gipskartondecken
Mounting set for trimless installation in plasterboard ceilings
Attrezzo di montaggio per soffitti di cartongesso a scomparsa

TYPE	CEILING THICKNESS/L/B (MM)	CODE
1 lamp	10-12,5-15-20-25/164/164	052-2921517
2 lamps	10-12,5-15-20-25/312/164	052-2922517
3 lamps	10-12,5-15-20-25/459/164	052-2923517

Elektronischer Transformator
Electronic transformer
Trasformatore elettronico

CAPACITY	L/B/H (MM)	CODE
70VA/230-240V/12V	102/51/30	002-70700
105VA/230-240V/12V	102/51/30	002-71000
150VA/230V/12V	206/45/40	002-71500

Vorschaltgeräteblock mit Kabel und Anschlussstecker
Control gear unit with cable and connector plug
Blocco di reattore elettronico con cavo e connettore a spina

CAPACITY	L/B/H (MM)	CODE
35W/220-240V electr.	186/89/37	002-86035
70W/220-240V electr.	186/89/37	002-86070

Betoneinbaugehäuse für Sichtbeton
Mounting housing for exposed concrete
Corpo per montaggio in calcestruzzo a vista

TYPE	L/B/H (MM)	CODE
1 lamp	445/167/205	052-2911520
2 lamps	445/315/205	052-2912520
3 lamps	445/462/205	052-2913520

Betoneinbaugehäuse für gespachtelte Betondecken
Mounting housing for primed concrete ceilings
Corpo per montaggio in calcestruzzo stuccato

TYPE	L/B/H (MM)	CODE
1 lamp	445/167/205	052-2911520
2 lamps	445/315/205	052-2912520
3 lamps	445/462/205	052-2913520

RGB LED INSET 12 12x1,1W 24V DC XAL-BUS

LED COLOUR	BEAM	CODE
RGB	super spot 6°	055-27096V
RGB	spot 15°	055-27096S
RGB	medium 24°	055-27096M
RGB	wide flood 80°	055-27096W

Use only with spotlight for QR-LP111 G53
Order XAL DMX power master unit separately
See page 101 for more details

See page 101 for more accessories

Colour and protection filters
Lenses and honeycomb louver