

FLOS

LIGHT STRIP 300 MM

Mounting	: Track mounting
Lamps description	: Top LED 11W 587 lm 3000K CRI 85
Voltage (V)	: 24
Environment	: Indoor
Notes	To avoid overload problems, the installation of an independent 240W power supply source is recommended for every 8 m installed (equivalent consumption to 4 1.5 m Light Strip modules).



OPTICAL

Aiming	: Fixed
Light distribution symmetry	: Symmetric
Beam angle	: 87°

ELECTRICAL

Transformer availability	: Separate item
Transformer mounting	: Remote
Emergency	: Without



PHYSICAL

Length (mm)	: 300
Weight (kg)	: 0,51

Light Strip 300 mm I8
designed by FLOS Architectural

Diffused LED light module to be installed in The Running Magnet System. 50/75/100% regulation of the light intensity with built-in regulator. Remote 24V power supply not included.

● 03.6210.14 Black

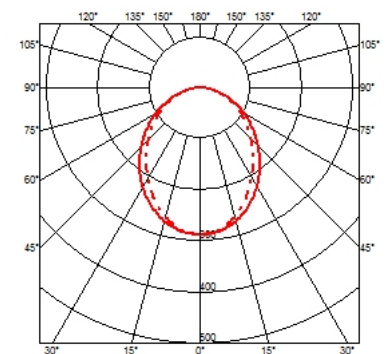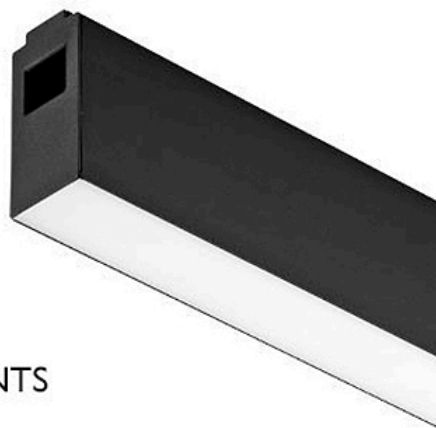

2 LED LIGHT ELEMENTS