

PLUS

Design by X. Claramunt and M. de Mas.

VIBIA
LIGHT IS CREATION

Reference

0640.

Application

Ceiling Lamps

Installation type

Built-in

Description

Recessed ceiling light, designed by X. Claramunt and M. de Mas. Convex methacrylate diffuser and matt white lacquer finish, though the whole fixture can be painted in the desired colour to make it blend perfectly into the ceiling. Its form recalls a real skylight.

Diffuser


Acrylic diffuser

Finish



0640-03.
Matt white
lacquer

Sketch




Electrical characteristics

1 x 2GX13 230V 55W (T5C)



Total 55 W

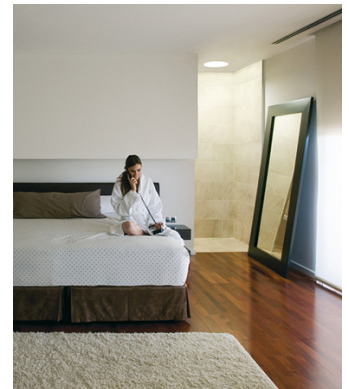

Physical characteristics

1 Box / 0.35 x 0.49 x 0.49 m. / Vol. 0.0840 m³ /
Gross weight 2.9 kg. / Net weight 2.3 kg.


Installation and assembly

Follow instructions of the installation guide

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Efficiency : 20.56%

Coordinate system : C-G

Total flux : 4200.00 lm

Maximum value : 72.52 cd/klm

Light position : C=0.00 G=0.00


Double symmetrical : 3

Isolux : Isolux (Suelo)

Light position :

X=0.00m Y=0.00m Z=3.00m

Light rotation :

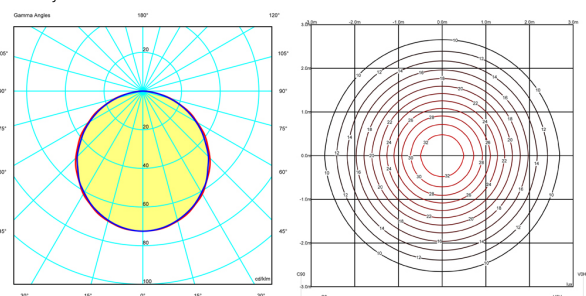

Certificates

